Ecco Shower Mixer With Divertor Trim Kits



SPECIFICATION

WELS RATING	N/A
WATERMARK LICENSE	WM-060073
TEMPERATURE RATING	MIN 1˚C-MAX 75˚C
PRESSURE RATING	MIN 150KPa-MAX 500KPa

FINISH


CHROME
NR301311ATCH

MATTE BLACK
NR301311ATMB

BRUSHED NICKEL
NR301311ATBN

GUN METAL
NR301311ATGM

BRUSHED GOLD
NR301311ATBG

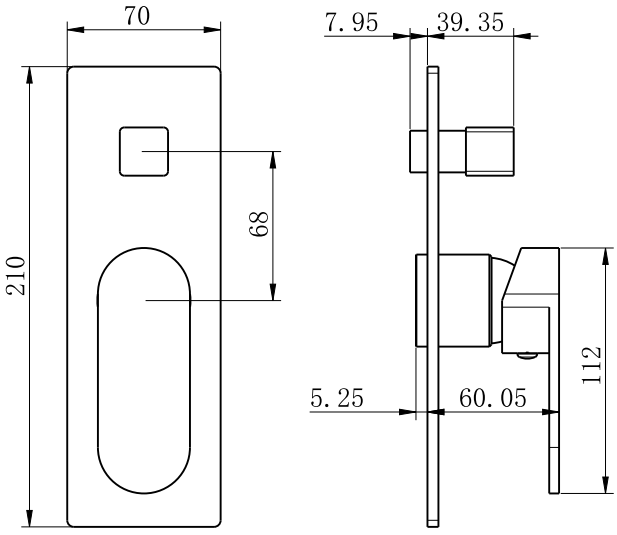

Dimensions are nominal measurements only.

MAINTENANCE AND CARE

All surfaces should be cleaned with mild liquid detergent or soap and water.
Do not use cream cleaners or citrus based cleaning products, as they are abrasive.
Use of unsuitable cleaning agents may damage the surface.Any damage caused in this way will not be covered by warranty

PACKING INCLUDES


- 1x plate
- 1x handle
- 1x knob
- 1x sleeve
- 1x cartridge bell
- 1x dressing ring


15 YEARS WARRANTY 15

WaterMark
AS/NZS 3718
WM-060073

Versions: V1


Installation Instruction

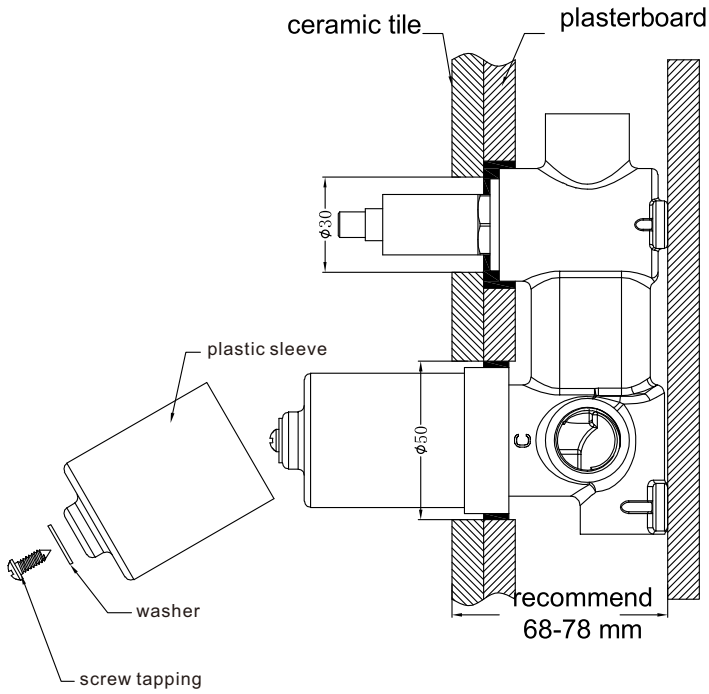

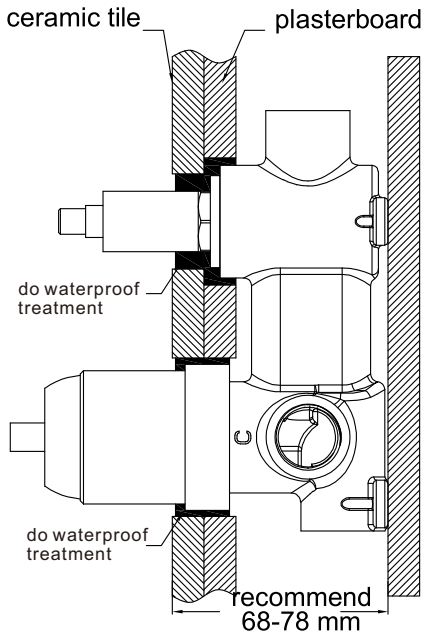

1.Install ceramic tile after drilling a φ50 and a φ30 hole according to above picture.
2.Take off self-tapping screw, washer,plastic sleeve.

3.Put on cartridge bell and sleeve .
4.Screw on dressing ring.
5.Do waterproof treatment for gap between ceramic tile and cartridge bell ,sleeve .

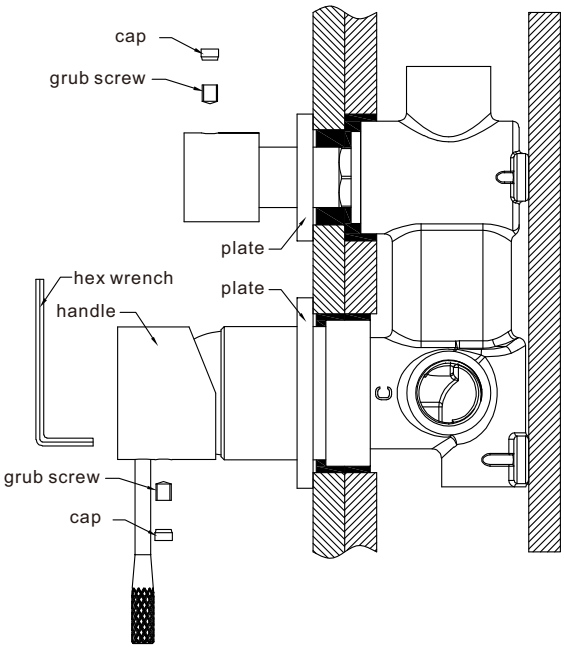

6.Put plates onto body.
7.Put washer onto cartridge stick, install handle,tighten grub screw of handle firmly by hex wrench,put cap into handle.
8.Put knob onto divertor cartridge, tighten grub screw of knob firmly by hex wrench, put cap into knob.