
Guidelines:

1. **Apply a suitable sealant to the underside of the sink flange/rim.**
2. **Place the sink into the bench top opening.**
3. **If benchtop thickness (A) is > = 30mm:**
   - **a. Insert the Thumb Screw (3) through the bracket (1) by approximately 5mm.**
   - **b. Slide the Bracket (1) fully into the bowl wall slot.**
   - **c. Repeat step "b" for all clips.**
   - **d. Ensure the sink is in the centre of the opening.**
   - **e.Rotate Thumb Screws (3) until all clips are firmly up against the underside of the bench, and then retighten in an opposed diagonal pattern.**
   - **f. CAUTION: Only tighten until the sink is securely against the bench. Don't use tools to tighten screws as this could damage the sink or benchtop.**
4. **If Bench Top Thickness (A) is < 30mm:**
   - **a. Insert the Thumb Screw (3) through the bracket (1) by approximately 5mm.**
   - **b. Slide the Bracket (1) fully into the bowl wall slot.**
   - **c. Screw the Extension (2) on to the end of the Thumb Screw (3).**
   - **d. Repeat step "c" for all clips.**
   - **e. Ensure the sink is in the centre of the opening.**
   - **f. Rotate Thumb Screws (3) until all clips are firmly up against the underside of the bench, and then retighten in an opposed diagonal pattern.**
   - **g. CAUTION: Only tighten until the sink is securely against the bench. Don't use tools to tighten screws as this could damage the sink or benchtop.**

Inset Sink
Installation Clip Set

Code: ICM



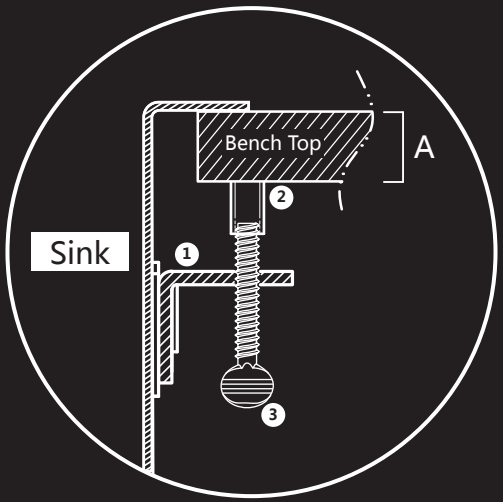

Bracket



Extension



Thumb Screw