
Pure SS316L Wall Basin/Bath Mixer With Separate Back Plate


Whole Set

Lead Free

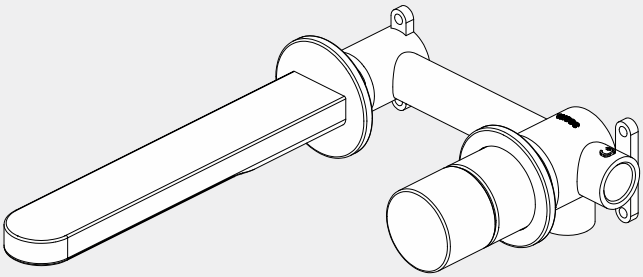

Version : 202503

Drawing

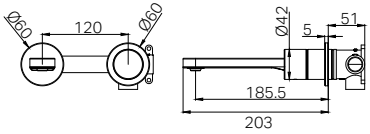

Specifications

Watermark License
WM-060073
Temperature Rating
Min 1 °C - Max 75 °C
Pressure Rating
Min 150kpa - Max 500kpa

Packaging Includes

1 x Universal Body
1 x Trim Kits Only

Finish & SKU


- **Brushed Bronze** NR172210bBZ
- **Graphite** NR172210bGR
- **Brushed Gold** NR172210bBG
- **Brushed Nickel** NR172210bBN

*Dimensions are nominal measurements only.
*Includes an additional non-restrictive aerator for bath use.

Installation Instruction For Body

GENERAL INSTRUCTIONS:

- This product must be installed by a licensed plumber. Ensure that your plumbing installation conforms to the Australian/New Zealand
  Standard AS/NZS 3500.

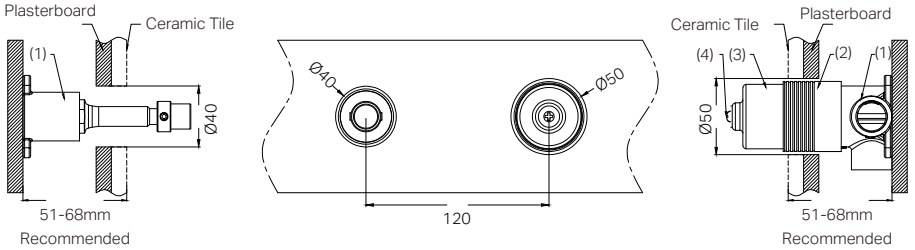


1. Secure the mixer body (1) to the nogging, ensuring an installation depth of 51-68mm from the nogging to the ceramic tile.

Note: Do not remove the plastic sleeve (2)from the mixer body.

2. Connect the cold and hot water supply lines and perform a leak test.


3. Drill a o50mm and a o40mm hole in the plasterboard for mixer body installation, and then position the plasterboard as shown in the above diagram.

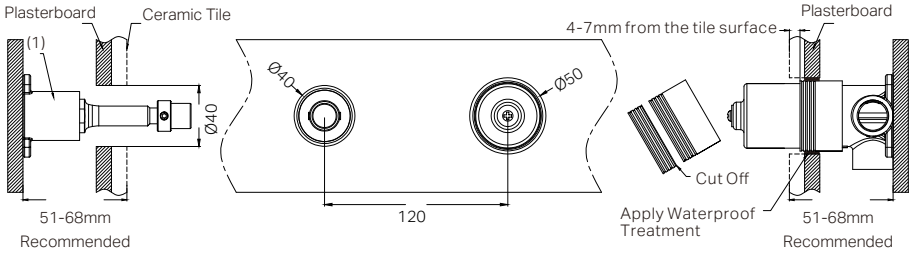

4.Measure 4–7 mm inward from the tile's outer surface and mark the corresponding position on the plastic sleeve. Then, waterproof the gap between the plasterboard and body.


5.Remove the self-tapping screw, washer, and plastic sleeve, then cut the sleeve at the marked point.

6.Reattach the self-tapping screw, washer, and plastic sleeve.

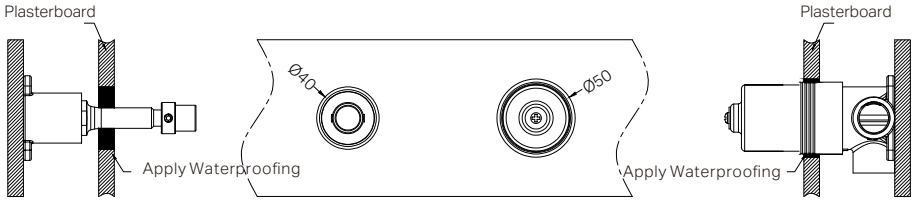


7.Waterproof the gap between the plasterboard and body


Installation Instruction For Trim Kits

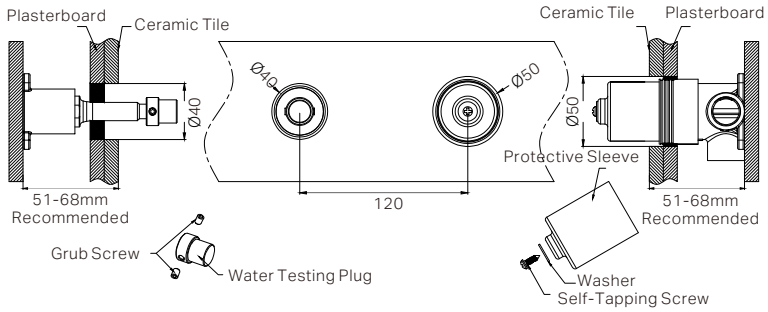

1. Drill a ø50mm and a ø40mm hole in the ceramic tile, then position it as shown in the above diagram.
2. Undo the self-taping screw to remove the protective sleeve, and release the grub screws to remove the water testing plug.

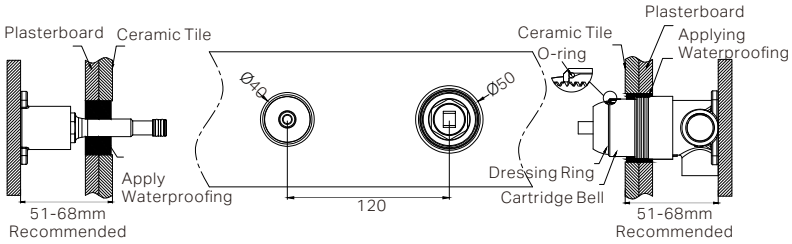

3. Insert the O-ring to the cartridge bell groove, and slide the dressing ring onto cartridge.
4. Apply waterproofing to the area indicated in the diagram above.
5.Tighten up the dressing ring on the cartridge bell.

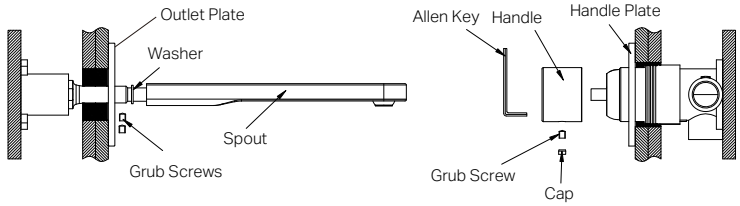

6. Slide the plates to outlet and plastic sleeve respectively, and the washer onto the outlet again, set the spout in place, and secure it tightly using the grub screw.

7. Position the handle, tighten it with a grub screw using an allen key, and cap the grub screw hole. please note: there is a washer between back plate and the spout.

MAINTENANCE AND CARE:

- Regularly check the mixer and connections for signs of wear or leaks.
- Clean the tap with mild soapy water to maintain its appearance, avoiding harsh chemicals and abrasive materials that may damage the finish.

FINAL INSPECTION:

- Ensure the tap operates smoothly and that there are no leaks at the connections.
- Clean the area and the newly installed tap with a soft cloth to remove any installation residues.

Nero


WATER RATING
www.waterrating.gov.au
5.0 litres per minute
Licence No. 1225


Pb
Lead Free


25 YEARS WARRANTY
25
25 YEARS WARRANTY