Nero

Opal Twin Shower set




SPECIFICATION

OVERHAND SHOWER WELS RATING	3STAR 9L/Min
WELS RATING	3STAR 9L/Min
WATERMARK LICENSE	WM-060093
TEMPERATURE RATING	Min 1℃-Max 75℃
PERSSURE RATING	Min 150KPa-Max 500Kpa

AVAILABLE FINISH

BRUSHED NICKEL
NR251905bBN

BRUSHED GOLD
NR251905bBG

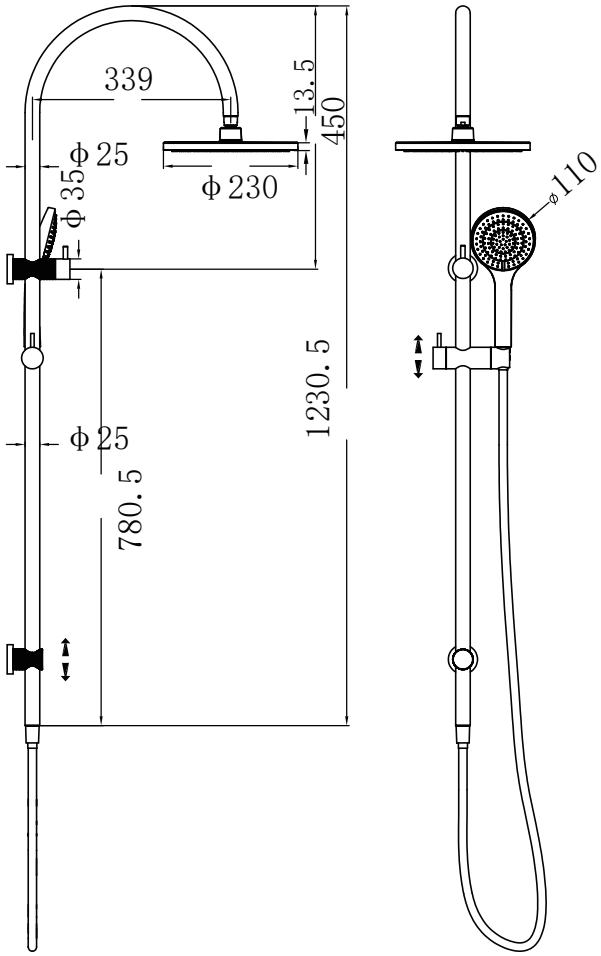

MAINTENANCE AND CARE

All surfaces should be cleaned with mild liquid detergent or soap and water. Do not use cream cleaners or citrus based cleaning products, as they are abrasive. Use of unsuitable cleaning agents may damage the surface.Any damage caused in this way will not be covered by warranty

PACKING INCLUDES

-1x hand shower (built-in check valve)
-1x shower head
-1x shower arm
-1x shower rail
-1x 1.5m PVC hose
-2x back plates
-1x slider bracket

15 YEARS WARRANTY 15


WaterMark
AS/NZS 3662
WM-060093

WATER RATING
9.0 litres per minute (overhead shower)
Licence No. 1225
Hand shower 3 star


Important

All products must be installed by licensed plumbers.


All pipework must be thoroughly flushed prior to installation, as foreign materials may block the flow regulating device and reduce the flow of water.

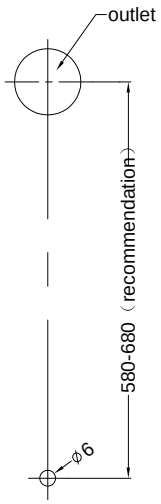


1.Drill a φ6mm hole at the downwards outlet vertical downward position in the recommended range.

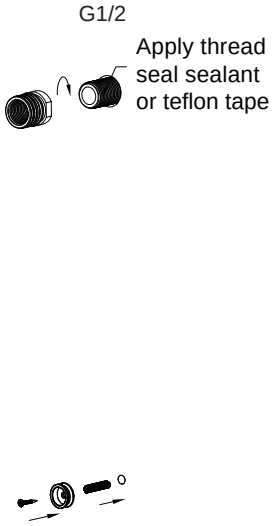


2. Screw the adapter onto the outlet. Push wall plug into drilled hole. Fit lower mounting pillar in place with screw. Tighten firmly.

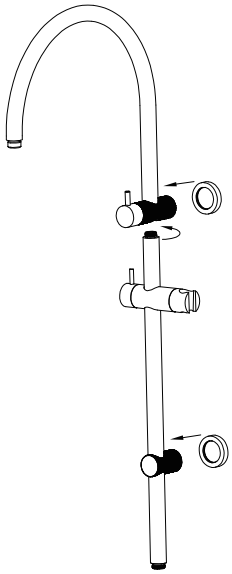


3. Screw shower rail into shower arm component. Tighten firmly.
Push 2 back plates onto shower arm component and lower mounting pillar.

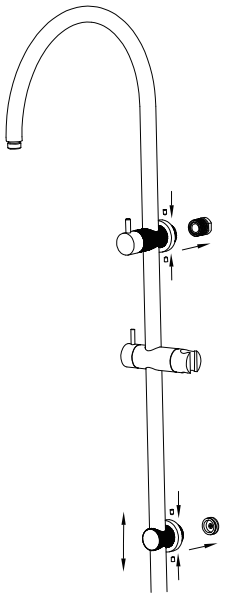

4. Locate and push shower rail assembly onto wall adaptors.
Tighten grub screws firmly with allen key provided.
Slide the back plates against the wall/tile face properly.

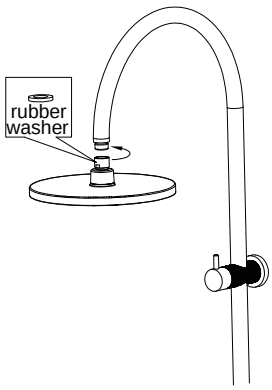

5.Screw shower head to shower arm with care. (Note the rubber washer in the shower head.)

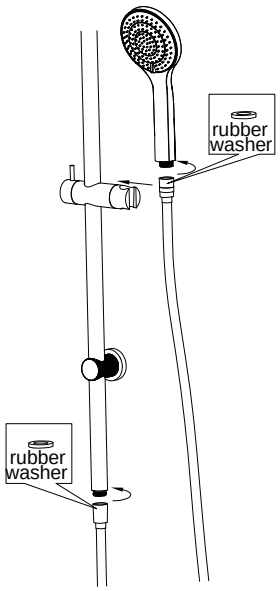

6. Please noted the rubber washer in the hand shower.
Connect shower rail and hand shower with hose.
TEST & CHECK FOR LEAKS.