
Nero

Opal Shower Bracket



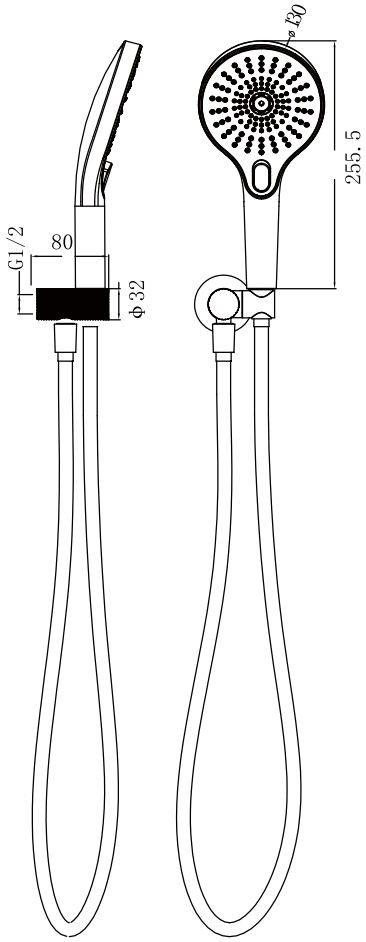

SPECIFICATION

WELS RATING	3 STAR 9L/MIN
WATERMARK LICENSE	WM-060073
TEMPERATURE RATING	MIN 1℃-MAX 75℃
PRESSURE RATING	MIN 150KPa-MAX 500KPa

AVAILABLE FINISH

GRAPHITE NR251905cGR	BRUSHED NICKEL NR251905cBN
BRUSHED BRONZE NR251905cBZ	BRUSHED GOLD NR251905cBG

MAINTENANCE AND CARE

All surfaces should be cleaned with mild liquid detergent or soap and water. Do not use cream cleaners or citrus based cleaning products, as they are abrasive. Use of unsuitable cleaning agents may damage the surface.Any damage caused in this way will not be covered by warranty

PACKING INCLUDES

-1x hand shower (built-in check valve)
-1x shower bracket
-1x 1.5m PVC hose
-1x back plate
-1x installation kit

15 YEARS WARRANTY 15

WaterMark
AS/NZS 3662
WM-060093

WATER RATING
9.0 litres per minute


Important

All products must be installed by licensed plumbers.

All pipework must be thoroughly flushed prior to installation, as foreign materials may block the flow regulating device and reduce the flow of water.




1.Apply thread sealant or teflon tape on outlet thread.




2.Pull back plate on together with bracket body.

Apply thread sealant or teflon tape



3.Screw shower bracket body on to outlet. DO NOT OVERTIGHTEN.

Slide the back plate against the wall/tile face properly.

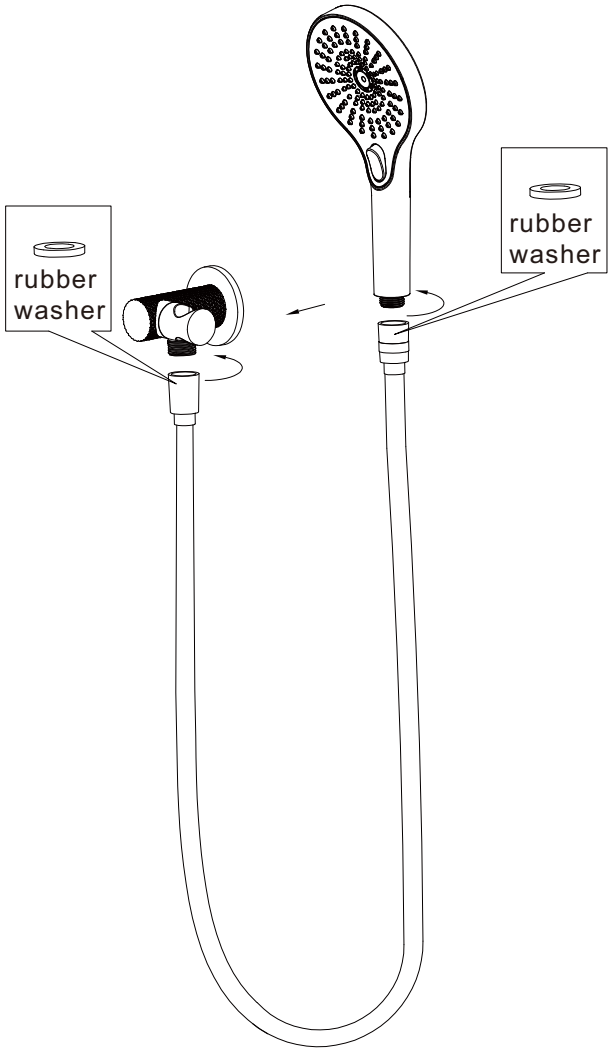

4. Connect bracket and hand shower with hose. TEST & CHECK FOR LEAKS.