York Shower Arm



SPECIFICATION


PRODUCT CODE	YSW508
WATERMARK LICENSE	WM-060073
TEMPERATURE RATING	MIN 1℃-MAX 75℃
PRESSURE RATING	MIN 150KPa-MAX 500KPa

FINISH

CHROME
NR508CH

MATTE BLACK
NR508MB

AGED BRASS
NR508AB

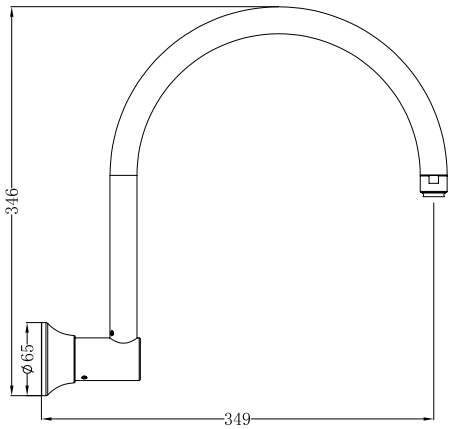

Dimensions are nominal measurements only.

MAINTENANCE AND CARE

All surfaces should be cleaned with mild liquid detergent or soap and water.
Do not use cream cleaners or citrus based cleaning products, as they are abrasive.
Use of unsuitable cleaning agents may damage the surface.Any damage caused in this way will not be covered by warranty

PACKING INCLUDES


- 1x shower arm
- 1x installation kits

15 YEARS WARRANTY 15


WaterMark
AS/NZS 3718
WM-060073

Nero


Installation Instruction

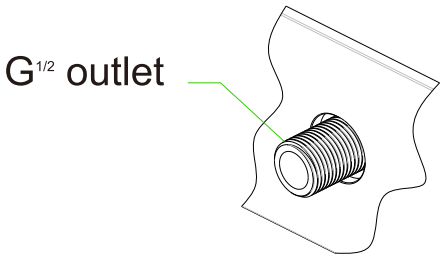

1.Apply thread sealant or
teflon tape on outlet thread.

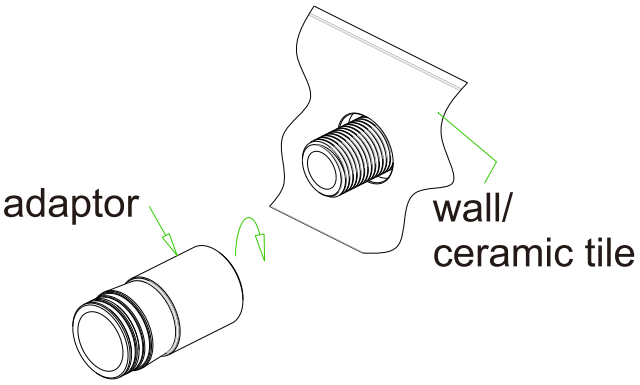

2. Screw adaptor on to outlet.
Make sure the face of inlet is flush
with wall/ceramic tile face.

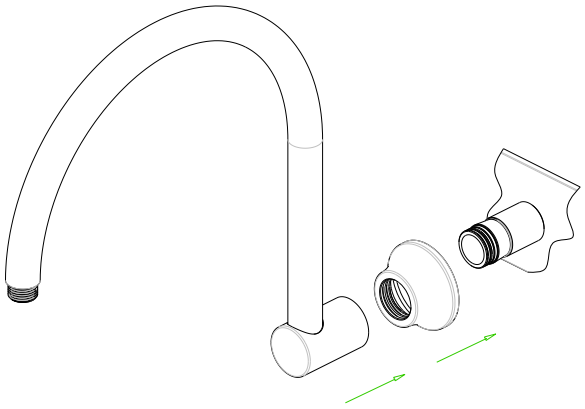

3. Pull back plate on together with
shower arm.

4.Pull shower arm onto adaptor.
Screw grub screw into spout by wrench and cover
by silicone cap.

