Nero

Builder Project Rail Shower




SPECIFICATION

WELS RATING	3 STAR 9L/MIN
WATERMARK LICENSE	WM-060093
TEMPERATURE RATING	MIN 1℃-MAX 75℃
PRESSURE RATING	MIN 150KPa-MAX 500KPa

AVAILABLE FINISH

BRUSHED NICKEL

NR232105aBN

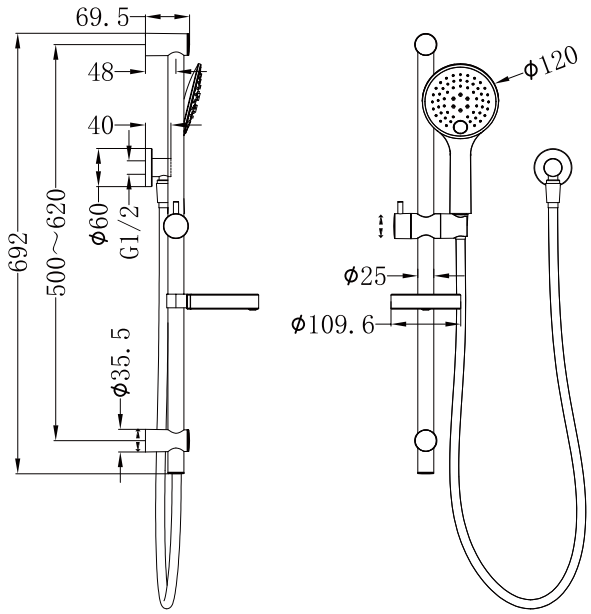

Dimensions are nominal measurements only.

MAINTENANCE AND CARE

All surfaces should be cleaned with mild liquid detergent or soap and water. Do not use cream cleaners or citrus based cleaning products, as they are abrasive. Use of unsuitable cleaning agents may damage the surface.Any damage caused in this way will not be covered by warranty

PACKING INCLUDES

- 1x handle shower（built-in check valve）
- 1x shower hose
- 1x elbow
- 1x shower rail

10 YEARS WARRANTY 10

WaterMark AS/NZS 3662 WM-060093


WATER RATING 9.0 litres per minute

Versions: V1


use Teflon tape




1.Put Teflon tape on outlet thread.



2.Pull dressing ring on the elbow body.




3. Screw elbow body on to outlet.

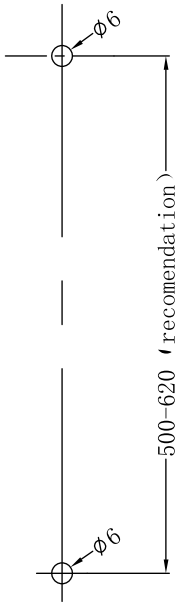


4.Drill two ϕ6mm holes according to above picture.




5.Mount bottom bracket on the ϕ6 hole by expansion plug and tapping screw.

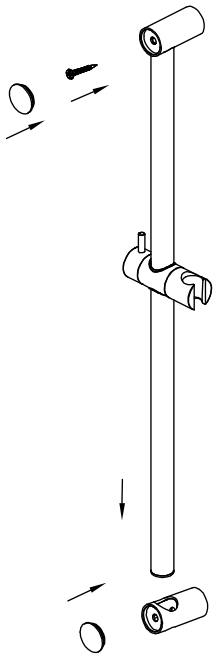

6.Plug shower rail in bottom bracket. Mount top bracket on the top hole by expansion plug and tapping screw.
Push plates onto two brackets.

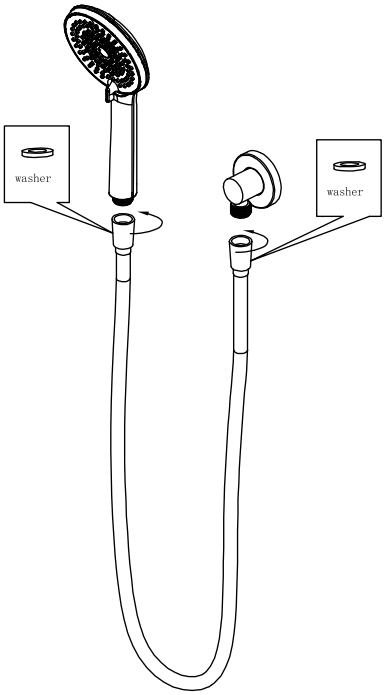

7.Connect hand shower with outlet by shower hose

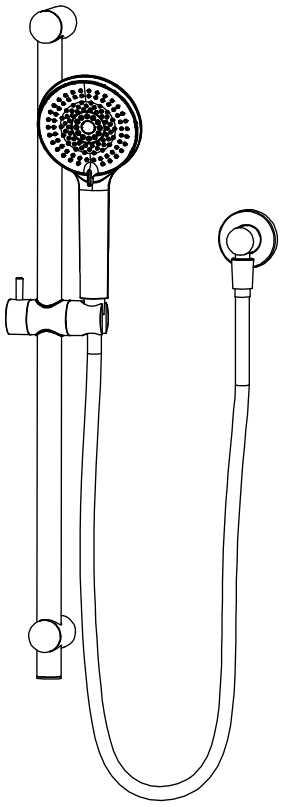

8.Test for leaks.