# Celia New Shower Set



Dimensions are nominal measurements only.

## SPECIFICATION

| | |
|---|---|
| OVERHAND SHOWER WELS RATING | NOT STAR RATED 7.5L/MIN |
| HAND SHOWER WELS RATING | NOT STAR RATED 6L/MIN |
| WATERMARK LICENSE | WM-060093 |
| TEMPERATURE RATING | MIN 1℃-MAX 75℃ |
| PRESSURE RATING | MIN 150KPa-MAX 500KPa |

## FINISH

CHROME

NR301505cCH

## MAINTENANCE AND CARE

All surfaces should be cleaned with mild liquid detergent or soap and water.
Do not use cream cleaners or citrus based cleaning products, as they are abrasive.
Use of unsuitable cleaning agents may damage the surface.Any damage caused in this way will not be covered by warranty

## PACKING INCLUDES


- 1x shower arm
- 1x shower rail
- 1x shower head
- 1x hand shower (built-in check valve)
- 1x 1.5m PVC hose

10 YEARS WARRANTY 10

WaterMark AS/NZS 3662 WM-060093

NOT STAR RATED
WATER RATING
7.5 litres per minute (overhead shower)
Licence No. 1225
Hand shower 0 star


Versions: V1

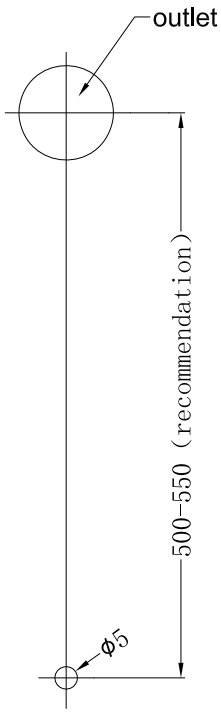



1.Drill a φ6mm hole at the outlet vertical downward position in the recommended range.





2. Screw the adapter on the outlet, and mount the bracket on theφ6mm hole by expansion plug and tapping screw.

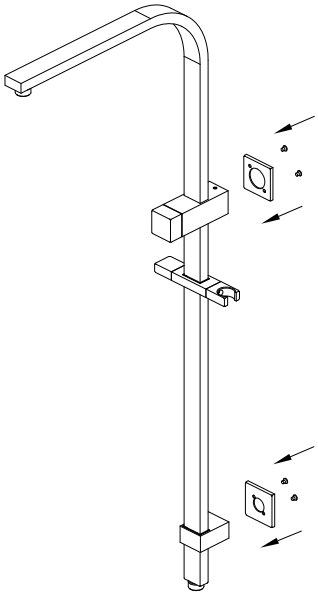


3. Screw the straight tube (with lower body) on diverter body, and then pull on the 2 dressing rings for both the diverter body and lower body.

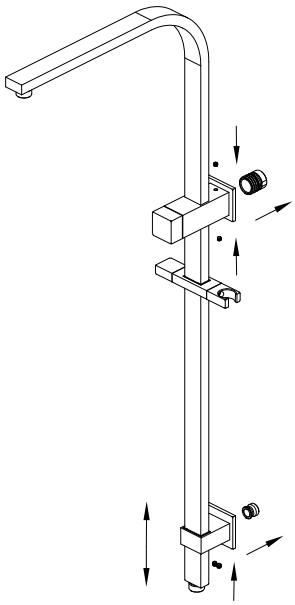

4.Adjust lower body position , and put diverter body and lower body on to the outlet adapter and the bracket, then tighten grub screws by Allen key.

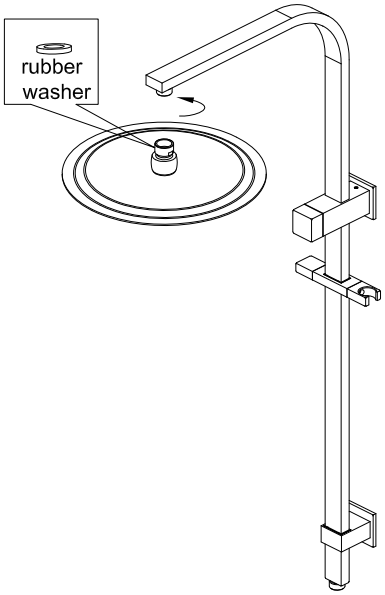


5.Screw on shower head.(note the rubber washer in the shower head.)

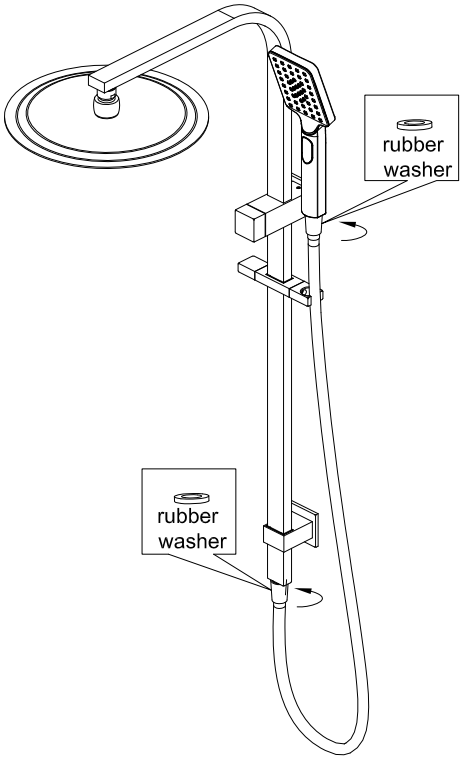


6.Screw shower hose to hand shower and shower rail.(note the rubber washers in the 2 joints of the shower hose).