Ecco Wall Basin Mixer Separate Back Plate Trim Kits



SPECIFICATION

WELS RATING	5 STAR 6L/MIN
WATERMARK LICENSE	WM-060073
TEMPERATURE RATING	MIN 1˚C-MAX 75˚C
PRESSURE RATING	MIN 150KPa-MAX 500KPa

FINISH


CHROME
NR301310BTCH

MATTE BLACK
NR301310BTMB

BRUSHED NICKEL
NR301310BTBN

GUN METAL
NR301310BTGM

BRUSHED GOLD
NR301310BTBG

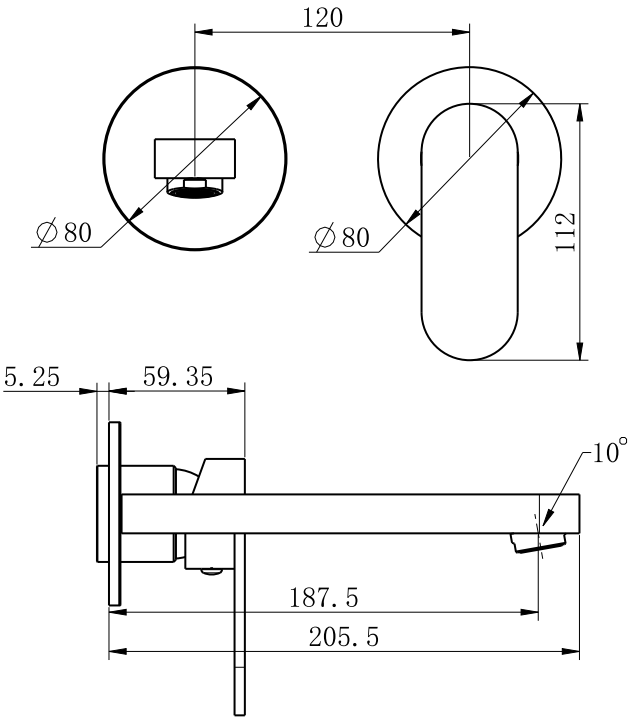

Dimensions are nominal measurements only.

MAINTENANCE AND CARE

All surfaces should be cleaned with mild liquid detergent or soap and water.
Do not use cream cleaners or citrus based cleaning products, as they are abrasive.
Use of unsuitable cleaning agents may damage the surface.Any damage caused in this way will not be covered by warranty

PACKING INCLUDES

- 2x plates
- 1x handle
- 1x spout
- 1x cartridge bell
- 1x dressing ring


15 YEARS WARRANTY 15

WaterMark
AS/NZS 3718
WM-060073

WATER RATING 6.0 litres per minute


Versions: V1

Installation Instruction

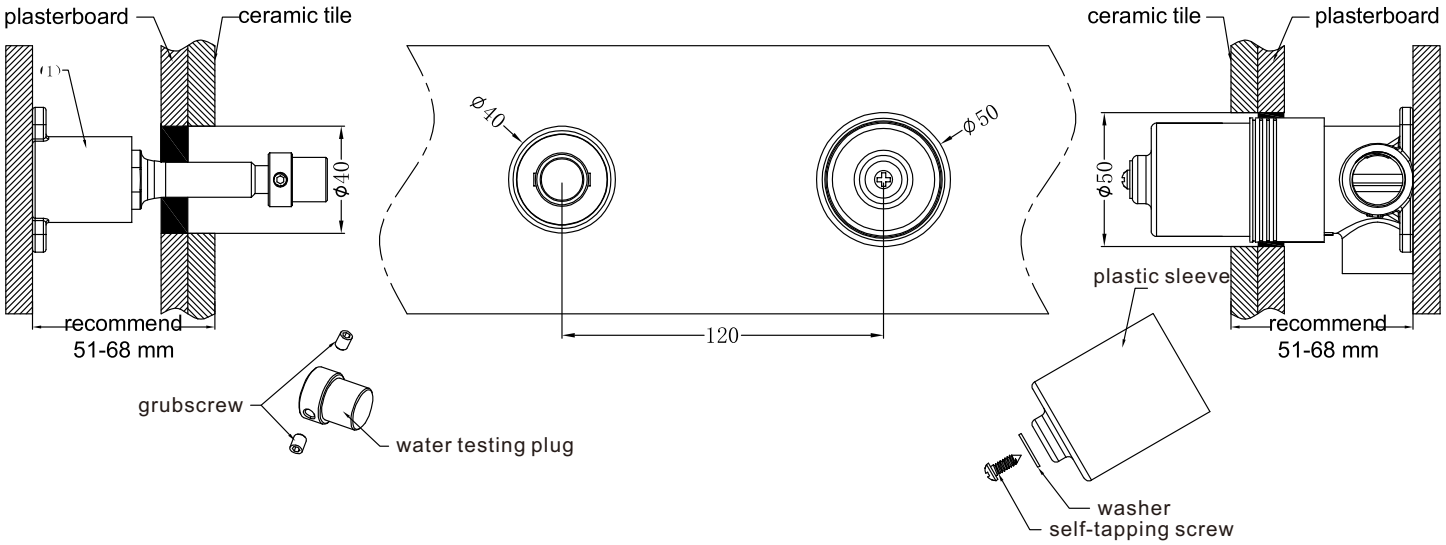

1.Install ceramic tile after drilling a φ50 and a φ40 hole according to above picture.


2.Remove self-tapping screw, washer,plastic sleeve,grub screw and water testing plug.

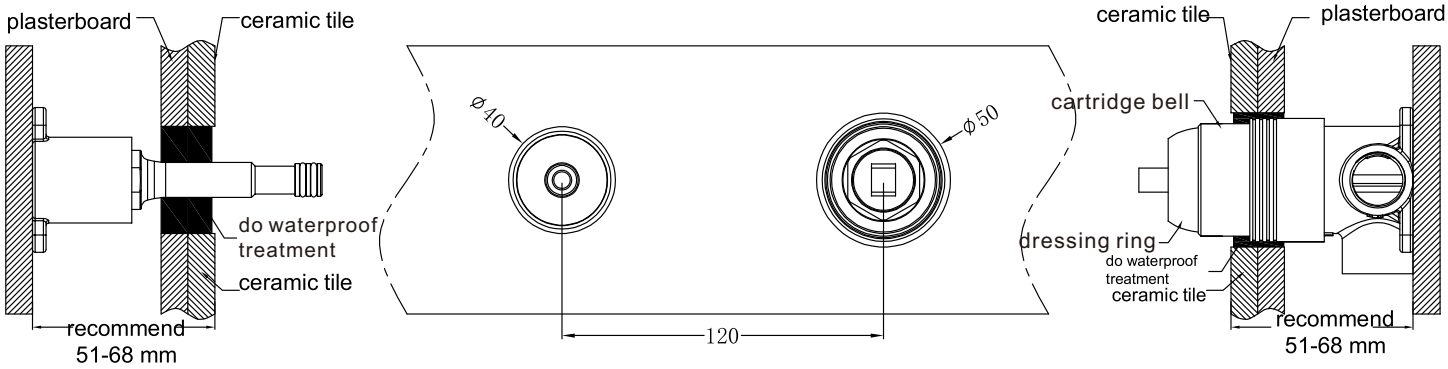

3.Put on cartridge bell.

4.Screw on dressing ring.

5.Do waterproof treatment for the gap between ceramic tile and cartridge bell and gap between ceramic tile and spout.

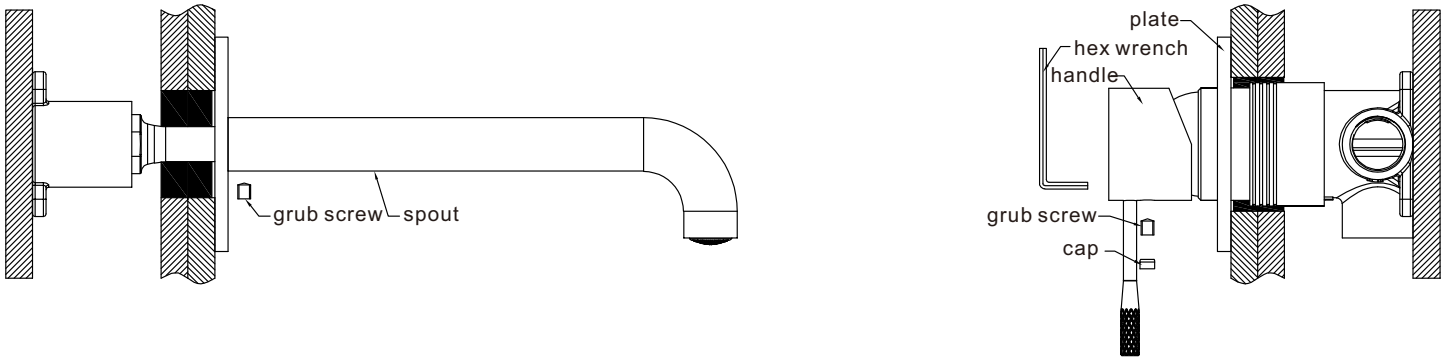

6.Put plate onto body.

7.Put washer onto cartridge stick, put on handle and tighten grub screw of handle firmly by hex wrench,put cap into handle.

8.Install spout onto body, tighten grub screw of spout firmly by hex wrench.