
Radiant Heating Pty Ltd Unit 1 / 18 Profit Pass, Wangara, WA 6065
Telephone: 08 9302 4140 Fax: 08 9303 4717 Web: radiantheating.com.au

radiant
TOWEL RAILS

MIRROR DEMISTER INSTALLATION INSTRUCTIONS

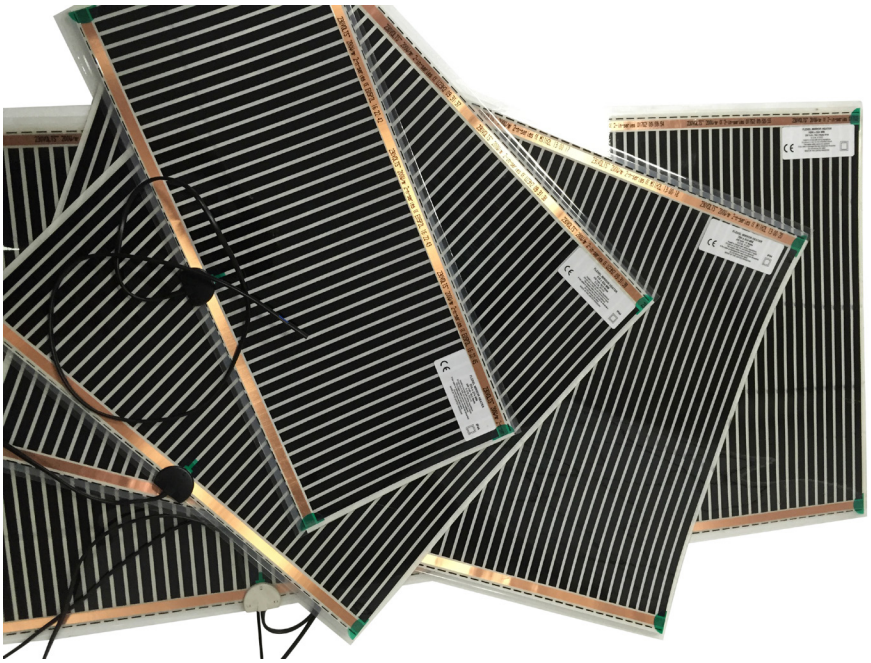

Attaching to the Mirror

1. Mark out the back of the mirror to indicate where the demister pad is to be fitted.

2. Peel off the protective paper to expose the adhesive.

3. Position one edge of the demister pad in the desired position, keeping the other edge away from the mirror.

4. Gradually lower the pad onto the mirror applying even pressure to ensure there are no air bubbles or creases.

5. If the mirror is not framed & is being fitted directly onto the wall, a small recess will need to be made in the wall to compensate for this & allow the mirror to sit flush.

Electrical Connections

All wiring must conform to the latest wiring regulations, if in doubt always consult a qualified electrician. The demister is a class II product complying to the Australia standard-Dept of Energy Certificate Number CS6970N.

It is recommended that the demister pad is connected via the lighting circuit or on a separate switch.

The circuit should be protected by a circuit breaker/ safety switch.

The wires are coloured as follows:
BLUE – Neutral, BROWN – Live/positive.

The demister pad must not be accessible once installed.

Any metal part surrounding the mirror must be earthed & comply with current wiring regulations.


Multiple pads may be fitted to a single mirror & should be connected in parallel – pads must not overlap.

The demister pad must not be cut or pierced as this may damage the insulation making it unsafe.

Radiant Heating Pty Ltd Unit 1 / 18 Profit Pass, Wangara, WA 6065
Telephone: 08 9302 4140 Fax: 08 9303 4717 Web: radiantheating.com.au

radiant
TOWEL RAILS

MIRROR DEMISTER INSTALLATION INSTRUCTIONS

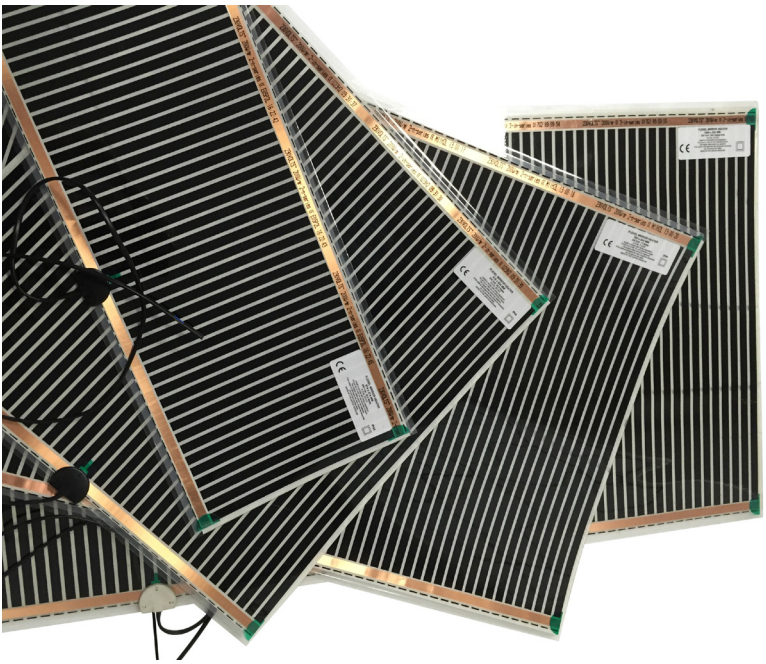

Description	Mirror Demister, manufactured from carbon enriched multi-layer polymer to 10kv.
Technical	Double insulated, class 2 product Material output 200watts per sq m Terminal block 7mm depth x 35mm diameter Pad thickness < 1mm Supplied coated with acrylic adhesive & release paper for permanent long-term adhesion
Electrical	230/240v with twin core 0.5mm cable
Country of manufacture	United Kingdom

Product code	Size	Output
7020	274 x 524mm	25 watt
7030	524 x 524mm	50 watt
7035	524 x 810mm	70 watt
7040	1024 x 524mm	105 watt
7050	1524 x 524mm	150 watt